

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
RCOH-1012

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTSBox Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for invention entitled:

SIGN SENSITIVE APERTURE CORRECTION SYSTEM AND METHOD

and invented by:

Sadao Takahashi

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 14 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
RCOH-1012

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☐ Formal Number of Sheets _____
- b. ☒ Informal Number of Sheets 8
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☐ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EL022642868US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
RCOH-1012

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):


Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	10	- 20 =	0	x \$22.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$82.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$790.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$790.00

- ☒ A check in the amount of \$790.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 50-0462 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: June 23, 1999


Ken I. Yoshida, Esq.
Reg. No. 37,009
KNOBLE & YOSHIDA LLC
Eight Penn Center, Suite 1350
1628 John F. Kennedy Blvd.
Philadelphia, PA 19103
(215) 599-0600

CC:

Sign Sensitive Aperture Correction System and Method

Field of the Invention

5 The current invention is generally related to image data correction, and more particularly related to an aperture correction process for image data.

BACKGROUND OF THE INVENTION

10 In image data processing for images captured by an input device such as a video camera and a digital camera, a high frequency portion of the image data is enhanced. This enhancement process is a type of edge-enhancement and is also called an aperture correction process. For example, referring to FIGURE 1, a prior-art system includes an image-capturing device 301 such as a video camera and a digital camera generates image data. The image data includes a Cyan/Yellow (Cy/Ye) signal as well as a Magenta/Green (Mg/G) signal which are respectively an output ratio between elements responsive to
15 Green/Red and Blue/Green in the image-capturing device. In response to the above signals, an interpolation matrix unit 302 outputs a Red (R) signal, a Green (G) signal, a Blue (B) signal as well as light intensity signal Y. The RGB color signals are white balanced by a white balance unit 303, then gamma converted by a gamma-conversion unit 304 and lastly processed by a subtractive primaries matrix unit 305 so as to generate Cr and
20 Cb signals. The Cr signal is a difference between R and Y signals while the Cb signal is a difference between B and Y signals. The Cr and Cb signals are outputted to output devices such as a display device. On the other hand, the light intensity signal Y is processed by an aperture correction device 306.

25 Still referring to FIGURE 1, a prior-art aperture correction device 306 corrects degraded data which includes a high frequency portion representing patterns such as a continuously repeated pattern and an abrupt intensity change pattern. The image data is generally more adversely affected as an aperture size increases. The aperture correction is generally more effective at a low resolution level such as 100 dpi or 100, 000 charged-couple device (CCD) elements. The aperture correction device 306 includes a high-pass
30 filtering unit 307 for extracting a high frequency portion of the intensity light signal Y. A coring unit 308 reduces noise of the extracted high frequency portion of the light intensity signal within a predetermined core range. In other words, between the two threshold values, the noise is reduced to zero. A gain adjust unit 309 amplifies the noise reduced

signal according to a predetermined gain value. A limiting unit 310 includes a function which has a predetermined maximal output value for any input value above a predetermined positive threshold value as well as a predetermined minimal output value for any input value below a predetermined negative threshold value. The limiting unit 310
5 outputs a limiting output signal according the above-described function. The aperture correction device 306 finally outputs an enhanced high-frequency portion light intensity signal by adding the limiting output signal to the original relative intensity value. The enhanced high-frequency portion light intensity signal is converted by another gamma conversion unit 311 before outputting to an output device such as a display unit.

10 Now referring to FIGURE 2, another prior-art aperture correction device 400 outputs individual enhanced high-frequency portion light intensity signals for each of the RGB signals. After image data is generated by an image-capturing unit 401, an interpolation matrix unit 402 converts the image data into RGB signals. A white balance unit 403 balances each of the RGB signals. The aperture correction device 400 corrects
15 degraded data which includes a high frequency portion representing patterns such as a continuously repeated pattern and an abrupt intensity change pattern. The aperture correction device 404 includes a set of high pass filtering units 404R, 404G and 404B for extracting a high frequency portion of each of the RGB signals. A set of coring units 405R, 405G and 405B reduces noise of each of the extracted high frequency portion of the
20 RGB signals within a predetermined core range. In other words, between the two threshold values, the noise is reduced to zero. A set of gain adjust units 406R, 406G and 406B each amplifies respective one of the noise reduced RGB signals according to a predetermined gain value. A set of limiting units 407R, 407G and 407B includes a function which has a predetermined maximal output value for any input value above a predetermined positive
25 threshold value as well as a predetermined minimal output value for any input value below a predetermined negative threshold value. The limiting units 407R, 407G and 407B each output a limiting output signal according the above-described function. The aperture correction device 400 finally outputs an enhanced high-frequency portion RGB signals by adding the limiting output signal to the corresponding original RGB signal. The enhanced
30 high-frequency portion RGB signal is converted by a set of gamma conversion units 408R, 408G and 408B before outputting to an output device such as a display unit.

Now referring to FIGURES 3A through 3D, the above-described problem is illustrated in graphs. FIGURE 3A illustrates a high frequency portion of an input signal, and FIGURE 3B shows the result of an edge enhancement process. The edge enhanced or aperture corrected signal undergoes a gamma conversion process for a given output device.

5 Notice that since the gamma correction is a non-linear conversion process, the aperture corrected signal is not uniformly converted. FIGURE 3D shows that the gamma correction process generates uneven results in an input signal to an output device such as a display unit. Because of the uneven input signal, the display unit shows a somewhat darker area as an average intensity level as indicated by a dotted line.

10 The above described prior-art aperture correction devices performs uniform and fixed corrections on a high-frequency portion of each signal independent of the relative intensity level of the signal. Since these uniform and fixed corrections overcompensate a low relative intensity signal, the overall output image appears to be adversely affected. In order to solve the overcompensation problem, one prior-art reference such as Japanese Laid
15 Patent Publication discloses the use of variable coefficients in the correction process. In other words, the disclosures of this prior-art reference teach the use of a low coefficient value for a low intensity signal.

An additional problem in visualizing the corrected image data still exists despite the above-described improved aperture correction. Although the gamma-corrections are
20 necessary for correcting the image data according the gamma characteristics of a given output device, the gamma-corrections often yield washed-out appearance in high-light portions of the image. To avoid the undesirable appearance, the gamma-corrections have been modified in the actual application so as to treat the image data in the high-light portions in a different manner. Because of this special treatment in the gamma-corrections,
25 the intensity in the image data and the output device such as a display monitor is often not linear. In other words, even though the average light intensity value of the image data after the gamma-corrections is substantially the same as that before the gamma-corrections, the appearance of outputs such as a display image on a display monitor becomes darker or lighter than the original. The discrepancy in perception also occurs when the gamma-
30 corrections are performed before the aperture corrections, and the perceptual discrepancy remains to be improved.

SUMMARY OF THE INVENTION

In order to solve the above and other problems, according to a first aspect of the current invention, a method of edge enhancement, includes the acts of: extracting a high frequency portion of data representative of relative light intensity of a pixel; determining a correction coefficient based upon a sign and a value of the extracted high frequency portion of the data, the sign being indicative of a relation between the relative light intensity of the pixel and that of pixels surrounding the pixel; and correcting the data based upon the correction coefficient.

According to a second aspect of the current invention, system for edge enhancement, includes: an extraction unit for extracting a high frequency portion of data representative of relative light intensity of a pixel; a determination unit connected to said extraction unit for determining a correction coefficient based upon a sign and a value of the extracted high frequency portion of the data, the sign being indicative of a relation between the relative light intensity of the pixel and that of pixels surrounding the pixel; and a correction unit connected to said determination unit and said extraction unit for correcting the data based upon the correction coefficient.

These and various other advantages and features of novelty which characterize the invention are pointed out with particularity in the claims annexed hereto and forming a part hereof. However, for a better understanding of the invention, its advantages, and the objects obtained by its use, reference should be made to the drawings which form a further part hereof, and to the accompanying descriptive matter, in which there is illustrated and described a preferred embodiment of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a block diagram illustrating a prior-art system for performing an aperture correction process.

FIGURE 2 is a block diagram illustrating another prior-art system for performing an aperture correction process.

FIGURES 3A-3D illustrate an unsolved problem of prior art aperture correction systems.

FIGURE 4 is a block diagram illustrating a first preferred embodiment of the aperture correction system according to the current invention.

FIGURE 5 is a flow chart illustrating acts involved in a first preferred process of performing aperture correction according to the current invention.

FIGURES 6A and 6B illustrate exemplary arrays of image-capturing elements.

FIGURE 7 is a block diagram illustrating a second preferred embodiment of the aperture correction system according to the current invention.

FIGURE 8 is a flow chart illustrating acts involved in a second preferred process of performing aperture correction according to the current invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

Referring now to the drawings, wherein like reference numerals designate corresponding structure throughout the views, and referring in particular to FIGURE 4, a first preferred embodiment of the aperture correction system according to the current invention includes an image-capturing device 101 such as a video camera and a digital camera generates image data. The image data includes a Cyan/Yellow (Cy/Ye) signal as well as a Magenta/Green (Mg/G) signal which are respectively an output ratio between elements responsive to Green/Red and Blue/Green in the image-capturing device. In response to the above signals, an interpolation matrix unit 102 outputs a Red (R) signal, a Green (G) signal, a Blue (B) signal as well as light intensity signal Y. The RGB color signals are white balanced by a white balance unit 103, then gamma converted by a gamma-conversion unit 104 and lastly processed by a subtractive primaries matrix unit 105 so as to generate Cr and Cb signals. The Cr signal is a difference between R and Y signals while the Cb signal is a difference between B and Y signals. The Cr and Cb

signals are outputted to output devices such as a display device. On the other hand, the light intensity signal Y is processed by an aperture correction device 106.

Still referring to FIGURE 4, the aperture correction device 106 corrects degraded data which includes a high frequency portion representing patterns such as a continuously repeated pattern and an abrupt intensity change pattern. The image data is generally more adversely affected as an aperture size increases. The aperture correction is generally more effective at a low-resolution level such as 100 dpi or 100,000 charged-couple device (CCD) elements. The aperture correction device 106 includes a pair of high-pass filtering units 110 and 111 for extracting a high frequency portion of the intensity light signal Y.

The vertical high-pass filtering unit 110 extracts a high frequency portion of the relative light intensity signal in a substantially vertical direction while the horizontal high-pass filtering unit 111 extracts a high frequency portion of the relative light intensity signal in a substantially horizontal direction. A mixing unit 112 compares the absolute values of the vertical and horizontal high frequency portions of the relative light intensity signal. If the absolute values are substantially the same, the average of the two is outputted for further processing by a coring unit 113. On the other hand, if the two values are different, the larger of the two is outputted for further processing by the coring unit 113. The coring unit 113 reduces noise of the extracted high frequency portions of the light intensity signal within a predetermined core range. In other words, between the two threshold values, the noise is reduced to zero. A gain adjust unit 114 amplifies the noise reduced signal according to a predetermined gain value. The gain adjust unit 114 outputs an amplified signal as well as an associated sign signal.

The first preferred embodiment of the aperture correction system according to the current invention includes a look-up table unit 115 which outputs an appropriate correction coefficient. The look-up table unit 115 stores a predetermined set of correction coefficients and selects a multiplication coefficient for a multiplication unit 116 based upon the sign signal and an original relative light intensity signal Y. The sign is determined by a relation between the relative light intensity of the pixel and that of pixels surrounding the pixel. For example, one implementation is that the sign is positive when a value of the data representative of the relative intensity of a pixel is larger than that of surrounding pixels. For the same example, the sign is negative when a value of the data representative of the

relative intensity of the pixel is smaller than that of surrounding pixels. The multiplication unit 116 multiplies the amplified signal by the selected multiplication coefficient. The product signal is further processed. A limiting unit 117 includes a function which has a predetermined maximal output value for any input value above a predetermined positive threshold value as well as a predetermined minimal output value for any input value below a predetermined negative threshold value. The limiting unit 117 outputs a limiting output signal according the above-described function. An adding unit 118 of the aperture correction device 106 finally outputs an enhanced high-frequency portion light intensity signal by adding the limiting output signal to the original relative intensity value Y. The enhanced high-frequency portion light intensity signal is converted by another gamma conversion unit 119 before outputting to an output device such as a display unit. Because the preferred embodiment of the aperture correction system according to the current invention variably adjusts a correction efficient value based upon the sign and the original relative light intensity value, the aperture correction is optimized, and the average light intensity is maintained before and after the aperture correction for natural appearance of the image.

Now referring to FIGURE 5, a flow chart illustrates acts involved in a first preferred process of performing aperture correction according to the current invention. Some of these acts are described in relation to elements of the first preferred embodiment as illustrated in FIGURE 4. An image is captured by an image-capturing unit 101. After the input image data is inputted, the image data is interpolated by an interpolation matrix unit 102 using a predetermined matrix in act A10 so as to generate separate R, G and B signals as well as a relative intensity signal Y. While the RGB signals are further processed by a white balance unit 103 in act A12, the relative light intensity signal Y is used in a different set of acts for aperture correction. The RGB signals are then converted by a gamma conversion unit 104 in act A14 and are finally outputted as Cr and Cb signals after a subtractive primary matrix is applied in act A16. A high frequency portion of the relative light intensity signal is extracted in both vertical as well as horizontal directions in act A18 using the V and H high pass filters 110 and 111. The act A18 involves a comparison of the high frequency portions and selects an average of the two if they are substantially the same or the larger of the two if they are different using the mixing unit

112. Act A20 reduces noise of the extracted high frequency portions of the light intensity signal within a predetermined core range, and act A22 amplifies the noise-reduced signal. In act A24, based upon a sign of the amplified signal and an original value of the relative light intensity signal, a correction coefficient is selected from a set of coefficients. The amplified signal is multiplied by the selected coefficient in act A26. The product is further processed by a limiting unit 117 in act A28 for limiting an output using a predetermined function before the output is added to the original relative light intensity value by an adder unit 118 in act A30. Lastly, the processed value is gamma converted. The acts performed by the aperture correction device 106 can be simultaneously performed while other acts A12, A14 and A16 are performed.

One example of the image-capturing unit 101 includes an array of image-capturing elements as shown in FIGURES 6A and 6B. FIGURE 6A illustrates an array of filters for complementary colors while FIGURE 6B illustrates an array of filters for primary colors.

Now referring to FIGURE 7, a second preferred embodiment of the aperture correction system according to the current invention includes an image-capturing device 101 such as a video camera and a digital camera generates image data. The image data includes a Cyan/Yellow (Cy/Ye) signal as well as a Magenta/Green (Mg/G) signal which are respectively an output ratio between elements responsive to Green/Red and Blue/Green in the image-capturing device. In response to the above signals, an interpolation matrix unit 102 outputs a Red (R) signal, a Green (G) signal, a Blue (B) signal. The RGB color signals are white balanced by a white balance unit 103. The G signal is further processed by an aperture correction device 204. In other words, the G signal is used to approximate the relative light intensity.

Still referring to FIGURE 7, the aperture correction device 204 corrects degraded data which includes a high frequency portion representing patterns such as a continuously repeated pattern and an abrupt intensity change pattern. The image data is generally more adversely affected as an aperture size increases. The aperture correction is generally more effective at a low-resolution level such as 100 dpi or 100, 000 charged-couple device (CCD) elements. The aperture correction device 204 includes a pair of high-pass filtering units 213 and 214 for extracting a high frequency portion of the signal G. The vertical

high-pass filtering unit 213 extracts a high frequency portion of the G signal in a substantially vertical direction while the horizontal high-pass filtering unit 214 extracts a high frequency portion of the G signal in a substantially horizontal direction. A mixing unit 215 compares the absolute values of the vertical and horizontal high frequency portions of the G signal. If the absolute values are substantially the same, the average of the two is outputted for further processing by a coring unit 216. On the other hand, if the two values are different, the larger of the two is outputted for further processing by the coring unit 216. The coring unit 216 reduces noise of the extracted high frequency portions of the light intensity signal within a predetermined core range. In other words, between the two threshold values, the noise is reduced to zero. A gain adjust unit 217 amplifies the noise reduced signal according to a predetermined gain value. The gain adjust unit 217 outputs an amplified signal as well as an associated sign signal.

The second preferred embodiment of the aperture correction system according to the current invention includes a look-up table unit 218 which outputs an appropriate correction coefficient. The look-up table unit 218 stores a predetermined set of correction coefficients and selects a multiplication coefficient for a multiplication unit 219 based upon the sign signal and the original G signal value. The sign is determined by a relation between the G value of the pixel and that of pixels surrounding the pixel. For example, one implementation is that the sign is positive when a value of the data representative of the G value of a pixel is larger than that of surrounding pixels. For the same example, the sign is negative when a value of the data representative of the G signal of the pixel is smaller than that of surrounding pixels. The multiplication unit 219 multiplies the amplified signal by the selected multiplication coefficient. The product signal is further processed. A limiting unit 220 includes a function which has a predetermined maximal output value for any input value above a predetermined positive threshold value as well as a predetermined minimal output value for any input value below a predetermined negative threshold value. The limiting unit 220 outputs a limiting output signal according the above-described function. A multiplication coefficient determination unit 221 determines a common multiplication coefficient M based upon the limiting output signal from the limiting unit 220 and the original value of the white balanced G signal from the white

balance unit 103. One way to determine the common multiplication coefficient M is expressed in the following equation (1):

$$M = 1 + E/G \quad \dots (1)$$

5

where E is an input signal. The common multiplication coefficient M is outputted to multiplication units 210, 211 and 212 for respectively multiplying the white balanced R, G and B signals by the common multiplication coefficient M. The RGB products are each converted by a gamma-conversion unit 205, and a light intensity subtractive primary matrix unit 206 generates Cr, Cb and an intensity signal Y based upon the converted RGB signals.

10

Now referring to FIGURE 8, a flow chart illustrates acts involved in a second preferred process of performing aperture correction according to the current invention. Some of these acts are described in relation to elements of the second preferred embodiment as illustrated in FIGURE 7. An image is captured by an image-capturing unit 101. After the input image data is inputted, the image data is interpolated by an interpolation matrix unit 102 using a predetermined matrix in act A100 so as to generate separate R, G and B signals. The RGB signals are further processed by a white balance unit 103 in act A102. A high frequency portion of the G signal is extracted in both vertical as well as horizontal directions in act A104 using the V and H high pass filters 213 and 214. The act A104 involves a comparison of the high frequency portions and selects an average of the two if they are substantially the same or the larger of the two if they are different using the mixing unit 215. Act A106 reduces noise of the extracted high frequency portions of the G signal within a predetermined core range, and act A108 amplifies the noise-reduced signal. In act A110, based upon a sign of the amplified signal and an original value of the G signal, a correction coefficient is selected from a set of coefficients. The amplified signal is multiplied by the selected coefficient in act A112. The product is further processed by a limiting unit 220 in act A114 for limiting an output using a predetermined function before the output is used in conjunction with the original G value to determine a common multiplication coefficient M in act A116. The RGB signals are each multiplied by the common multiplication coefficient M in act A118 and then converted by a gamma conversion unit 205 in act A120 and are finally outputted as Cr and

15

20

25

30

Cb signals and a relative light intensity Y signal after a light intensity subtractive primary matrix is applied in act A122. The acts performed by the aperture correction device 204 must take place before other acts A120 and A122 are performed.

5 It is to be understood, however, that even though numerous characteristics and advantages of the present invention have been set forth in the foregoing description, together with details of the structure and function of the invention, the disclosure is illustrative only, and that although changes may be made in detail, especially in matters of shape, size and arrangement of parts, as well as implementation in software, hardware, or a combination of both, the changes are within the principles of the invention to the full
10 extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

WHAT IS CLAIMED IS:

1. A method of edge enhancement, comprising the acts of:

extracting a high frequency portion of data representative of relative light
intensity of a pixel;

determining a correction coefficient based upon a sign and a value of the
extracted high frequency portion of the data, the sign being indicative of a relation
between the relative light intensity of the pixel and that of pixels surrounding the
pixel; and

correcting the data based upon the correction coefficient.

2. The method of edge enhancement according to claim 1 wherein said sign is
positive when a value of the data representative of the relative intensity of the
pixel is larger than that of surrounding pixels.

3. The method of edge enhancement according to claim 1 wherein said sign is
negative when a value of the data representative of the relative intensity of the
pixel is smaller than that of surrounding pixels.

4. The method of edge enhancement according to claim 1 wherein the data
representative of the relative light intensity of the pixel is obtained from an input
signal representative of color green (G) in RGB input signals.

5. The method of edge enhancement according to claim 1 wherein a
predetermined set of values is stored in a lookup table for selecting the correction
coefficient value.

6. A system for edge enhancement, comprising:

an extraction unit for extracting a high frequency portion of data
representative of relative light intensity of a pixel;

a determination unit connected to said extraction unit for determining a correction coefficient based upon a sign and a value of the extracted high frequency portion of the data, the sign being indicative of a relation between the relative light intensity of the pixel and that of pixels surrounding the pixel; and

5 a correction unit connected to said determination unit and said extraction unit for correcting the data based upon the correction coefficient.

10 7. The system for edge enhancement according to claim 6 wherein said sign is positive when a value of the data representative of the relative intensity of the pixel is larger than that of surrounding pixels.

15 8. The system for edge enhancement according to claim 6 wherein said sign is negative when a value of the data representative of the relative intensity of the pixel is smaller than that of surrounding pixels.

9. The system for edge enhancement according to claim 6 wherein the data representative of the relative light intensity of the pixel is obtained from an input signal representative of color green (G) in RGB input signals.

20 10. The system for edge enhancement according to claim 6 wherein said determination unit further comprises a look up table storing a predetermined set of values for selecting the correction coefficient value.

25

The aperture correction system variably adjusts a correction efficient value based upon a sign and an original relative light intensity value or its equivalent. Because the correction is relative light intensity sensitive, the aperture correction is optimized, and the average light intensity is maintained before and after the aperture correction for natural appearance of the image.

FIG. 1
(PRIOR ART)

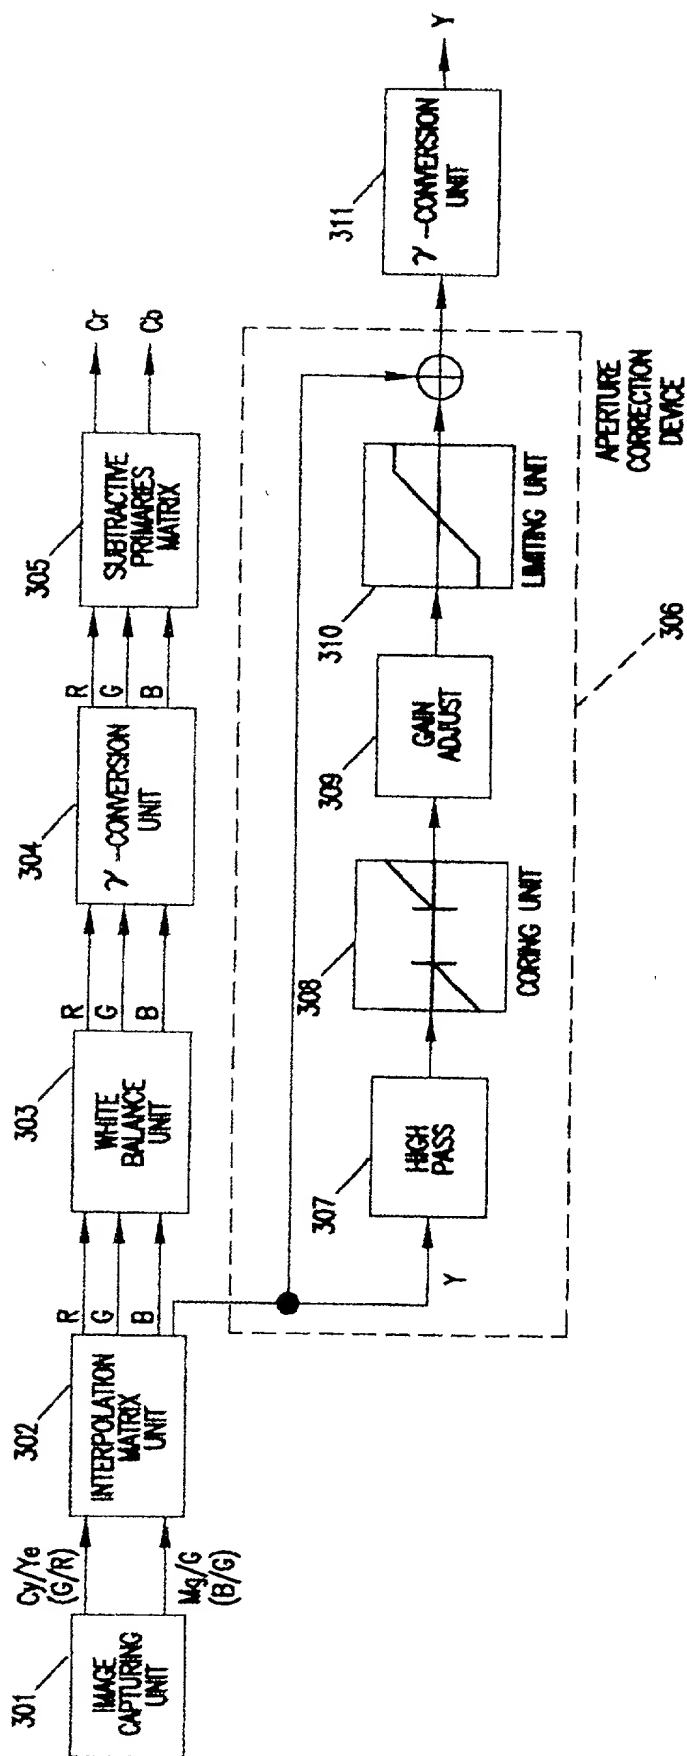


FIG. 2






FIG. 3
(PRIOR ART)

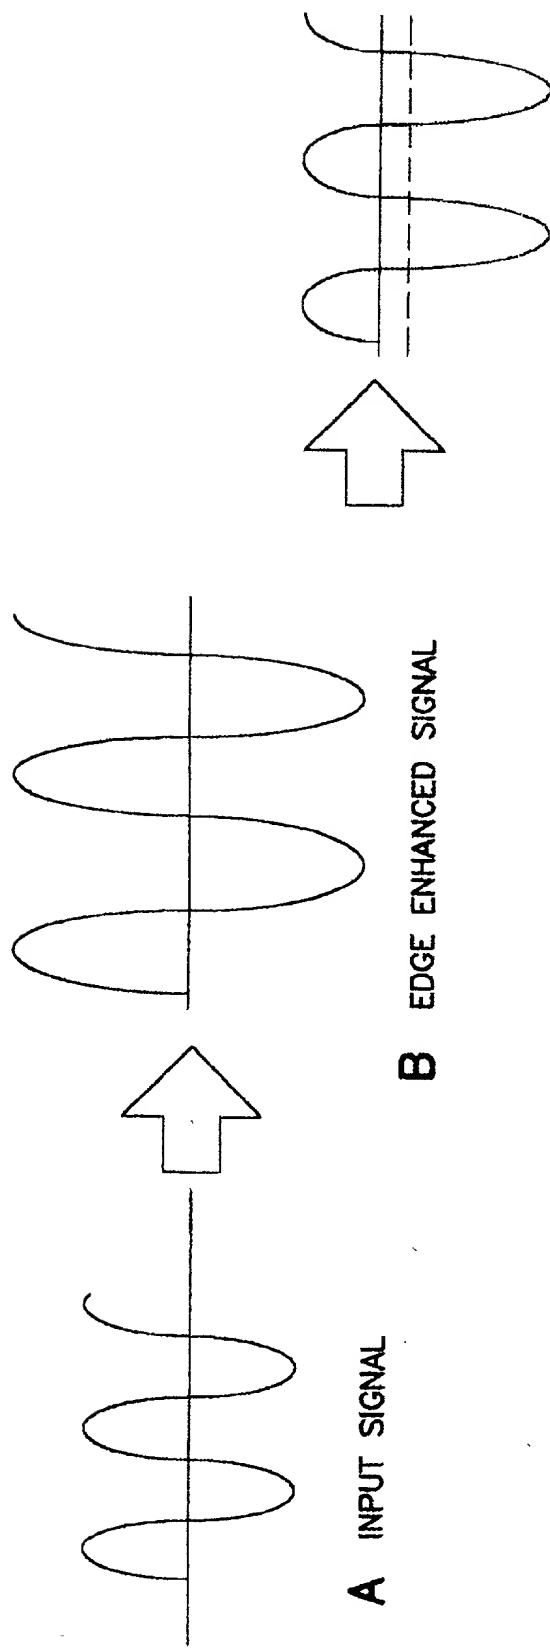

D γ - CONVERTED SIGNAL

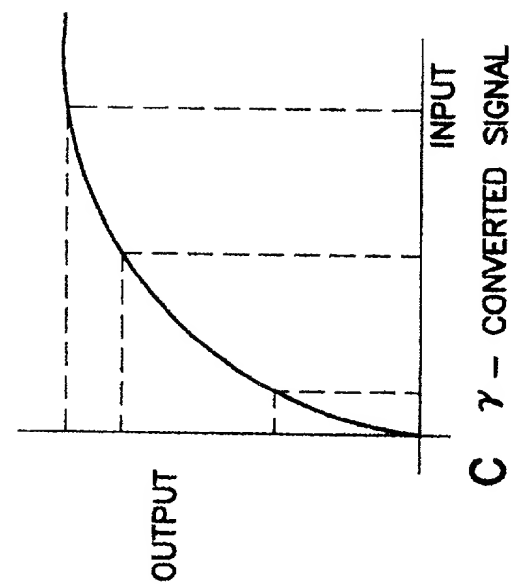

C γ - CONVERTED SIGNAL

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
0	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	
2	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100		
3	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100			
4	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	8																			

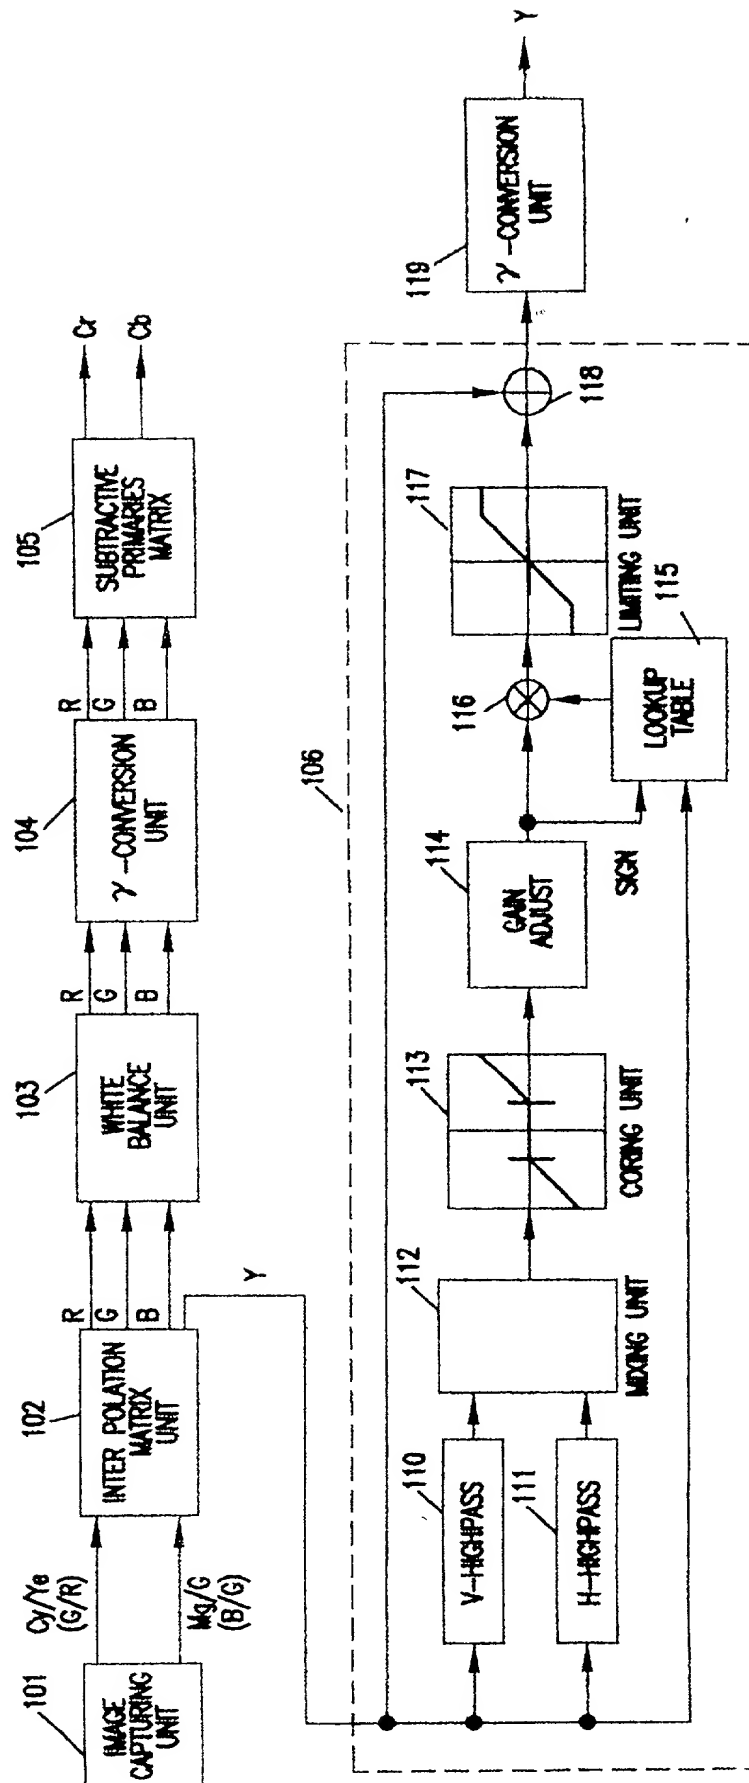


FIG. 5

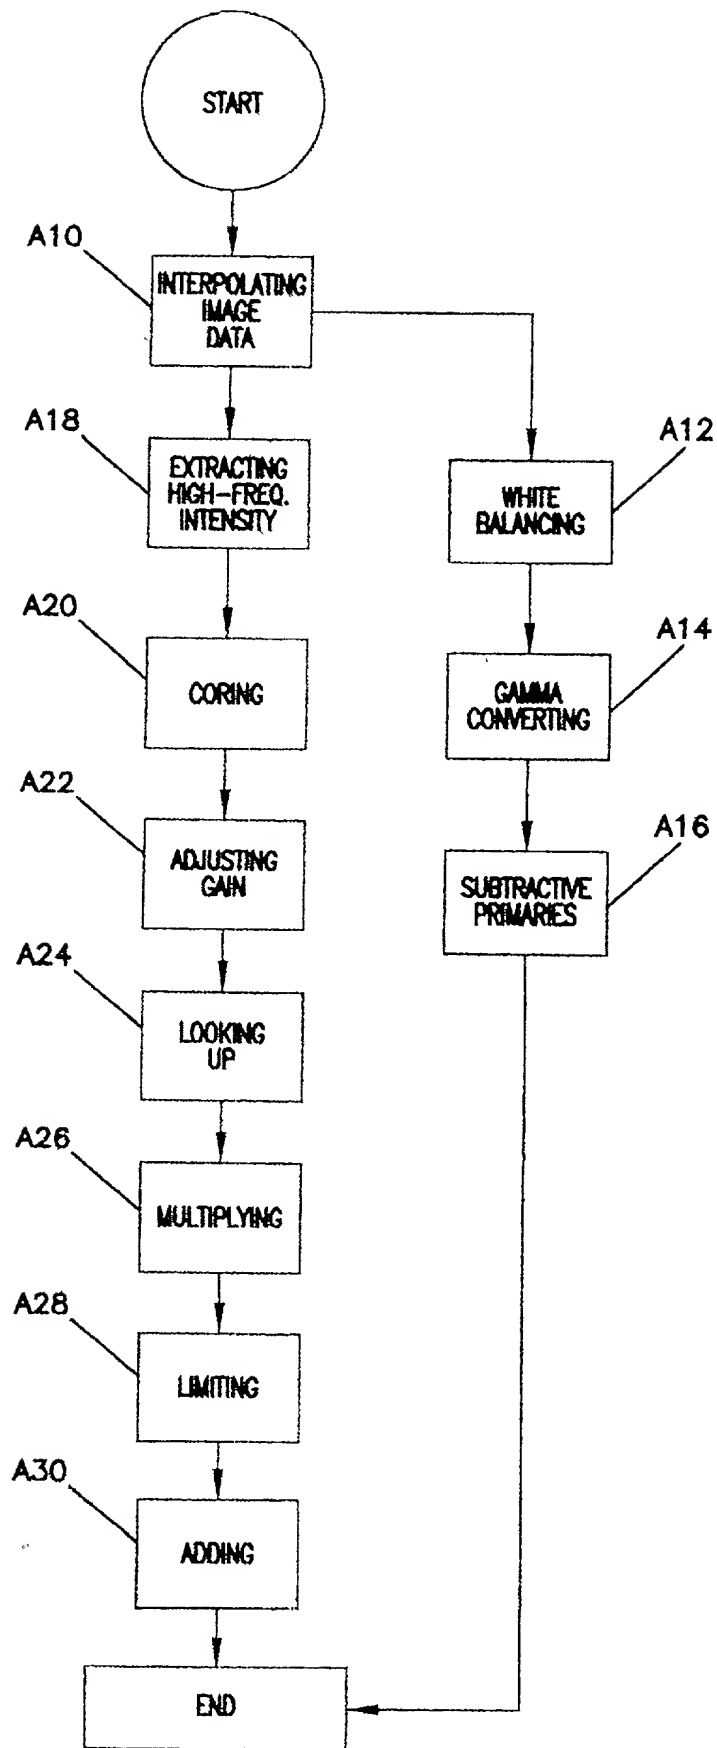


FIG. 6(a)

Cy	Ye	Cy	Ye
Mg	G	Mg	G
Cy	Ye	Cy	Ye
G	Mg	G	Mg

...

...

FIG. 6(b)

G	R	G	R
B	G	B	G
G	R	G	R
B	G	B	G

...

...

FIG. 7


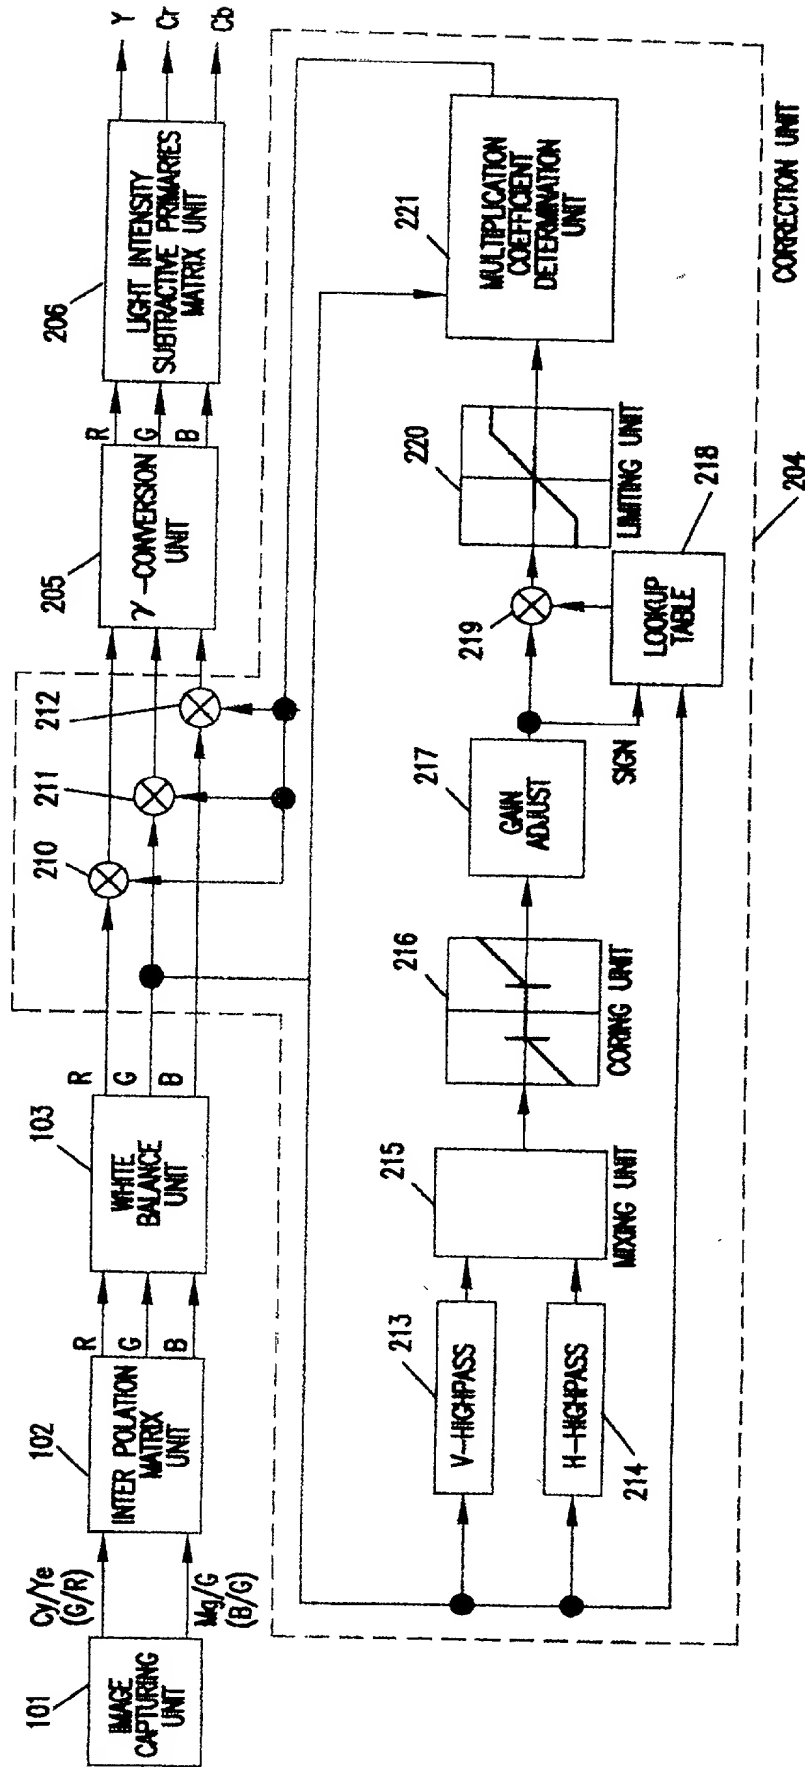


FIG. 8

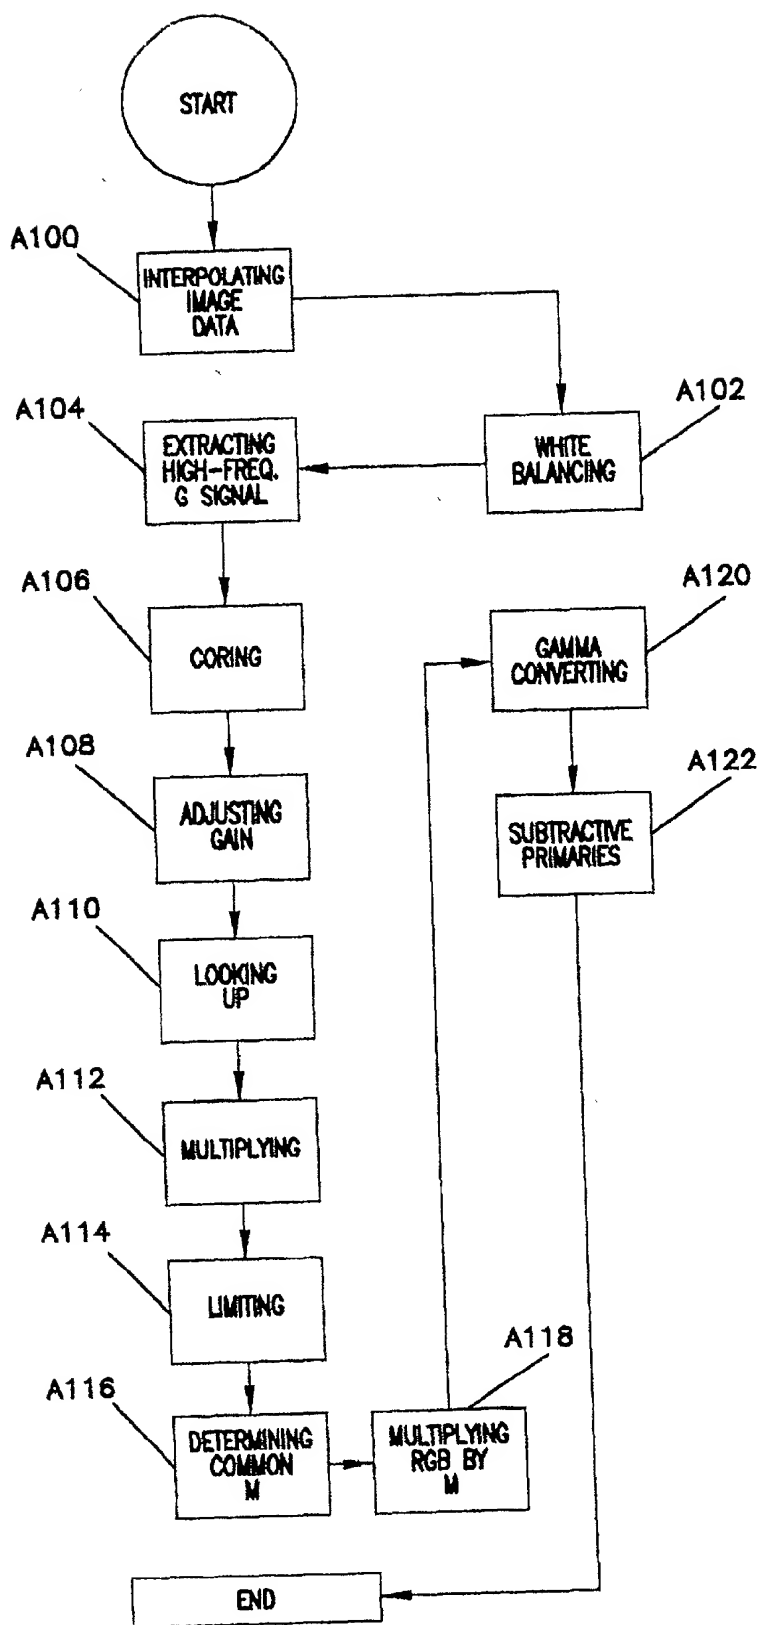

Docket No.
RCOH-1012

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SIGN SENSITIVE APERTURE CORRECTION SYSTEM AND METHOD

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International Application Number _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Not Claimed
JPAP10-193612	JAPAN	25 JUNE 1998	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Ken I. Yoshida
John L. Knoble

Registration No. 37,009
Registration No. 32,387

Send Correspondence to: **Ken I. Yoshida**
KNOBLE & YOSHIDA LLC
Eight Penn Center, Suite 1350
1628 John F. Kennedy Blvd., Philadelphia, PA 19103

Direct Telephone Calls to: *(name and telephone number)*
Ken I. Yoshida (215) 599-0600

Full name of sole or first inventor Sadao Takahashi	
Sole or first inventor's signature <i>Sadao Takahashi</i>	Date <i>June 21, 1999</i>
Residence Kanagawa, Japan	
Citizenship Japanese	
Post Office Address 3-6, Nakamagome 1-chome, Ota-ku, Tokyo, Japan	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	